

BONA **RESILIENT SOLUTION** Product Catalogue 2023





RETHINK, RENEW, UPGRADE

Bona Resilient Solution: Renewing Worn Floors

Struggling with old, worn, and cracked linoleum, PVC, vinyl, rubber or LVT floors? Bona Resilient Solution is an innovative and highly effective system that renews and extends the life of resilient floors. This high-quality, sustainable programme allows you to not just maintain a floor's freshness, but also to totally transform its look, without replacing it. Even in heavy-traffic areas, floors can be sealed for extra durability and long-term protection.



BONA RESILIENT SOLUTION




An innovative and highly effective solution that transforms and extends the life of resilient floors. This high-quality, sustainable programme allows you to not just maintain a floor's freshness, but also to totally transform its look, without replacing it. Even in heavy traffic areas, surfaces are sealed for



TIME AND MONEY SAVINGS

Replacing a floor involves ripping up the old floor, sanding and leveling the subfloor, plus installation of a new floor, which all together is very time consuming. The Bona Resilient Solution can be performed in as little as a few hours which means no need to close the commercial space resulting in convenience and better profitability.

extra durability and long-term protection. All achieved in 50% less downtime than replacing a resilient floor. And now floor owners can rest assured knowing that the Bona Resilient Solution provides a solid warranty that guarantees it against utmost wear and tear.




IMPROVED HYGIENE FOR HEALTHIER SURFACES

Bona's unique process along with our coatings creates a monolithic surface that seals against microorganisms thus resulting in a floor with the highest level of hygiene standards as mandated by The Technical Rules of Biological Agents (TRBA).

UNSURPASSED DURABILITY

Heavy traffic is a given in commercial settings and the Bona Resilient Solution does not disappoint. Compared to the industry average, Bona Pure and Bona Pure HD stand out in terms of both wear and chemical resistance.

CHEMICAL RESISTANCE (DISINFECTANTS)





SUSTAINABILITY FOR A BETTER WORLD

In a study conducted by the IVL Swedish Environmental Research Institute, they found that renewing with the Bona Resilient Solution rather than replacing a resilient floor results in 90% savings in both energy and reduced carbon footprint.

WEAR RESISTANCE





ENDLESS DESIGN POSSIBILITIES

The Bona Resilient Solution offers numerous design options from changing the colour and design of a floor, to adding decals, graphics and logos. The possibilities are endless.



CONTENTS

COATINGS

| Commercial | 6 |
|------------|---|
| Sport | 8 |
| ESD | 9 |

SANDING

| Machines | 10 |
|-----------|----|
| Abrasives | 14 |

FLOOR CARE

| Cleaning | 16 |
|------------------------|----|
| Commercial Maintenance | 17 |
| Sport Maintenance | 18 |

ACCESSORIES

| Tools & Accessories | 18 | 5 |
|---------------------|----|-----|
| 10015 & ACCESSONES | | I C |

COATINGS | RESILIENT

| Resilient System | Туре | Article Number | Packaging | Pcs/transport package | Package pallet |
|--|--------------------|--|--------------------|--------------------------|-------------------|
| Bona Pure HD | Hard-elastic and h | ardwearing PUR-coating for | r renewal of resil | ient floor coverinc | is on hase |
| Bolla Pule HD | of PVC, rubber or | r linoleum. Particularly suita wear. Excellent resistance t | able for thin, ha | rd-elastic mats in | locations |
| and the second sec | | nplify routine maintenance a | | | 1 |

Key Benefits:

- Extreme wear resistance
- Allows full traffic after 12h
- Clear, non-yellowing formula
- Long-lasting protection

Technical Data:

Category: Waterborne 2-comp Drying time: 2-3 h between coats Application tools: Bona Roller (11 mm) Coverage: 8–10 m²/L and application

| _ | Matt | ES207920001 | 5 L | 3 | 36 |
|---|----------|-------------|--------|---|----|
| | Hardener | ES205045011 | 0.45 L | 3 | |

It serves as a long-term surface protection for heavily trafficked industrial and commercial areas, restoring appearance and simplifying routine maintenance. Bona Pure consists of a waterborne, clear, non-yellowing formula.

Key Benefits:

- Superb resistance to disinfectants
- Safe and easy application
- Brilliant levelling properties

Technical Data:

Category: Waterborne 2-comp **Drying time:** 2-4 h between coats **Application tools:** Bona Roller (11 mm) **Coverage:** 8–10 m²/L and application

| Extra Matt | ES200620001 | 5 L | 3 | 36 |
|------------|-------------|--------|---|----|
| Matt | ES201620003 | 5 L | 3 | 36 |
| Hardener | ES205045001 | 0.45 L | 3 | |

Quick drying PUR-based primer for pore filling of deep cleaned and sanded linoleum floors. Improves levelling and smoothness of the following coat, which typically can be applied already after 1 hour.

Key Benefits:

- Fills pores and reduces absorbency
- Ultra-quick drying
- Essential for linoleum

Technical Data:

Category: Waterborne 2-comp Drying time: 1-2 h between coats Application tools: Bona Roller (5 or 11 mm) Coverage: 20–25 m²/L and application

| | EB400620001 | 5 L | 3 | 36 |
|----------|-------------|-------|---|----|
| Hardener | EH390002001 | 0.2 L | 3 | |

Two-part polyurethane filler and adhesive. Developed for quick and durable repair of resilient floorings such as PVC/LVT, Rubber and Linoleum, with great adhesion to many materials. Can also be used to glue down smaller pieces of mat. Resistant to high impact, elevated temperature, moisture, and many solvents and chemicals.

Key Benefits:

- Super-quick hardening
- Excellent adhesion properties
- High durability
- Virtually odourless

Technical Data:

Colour: Light Grey Open time: 3,5 min Drying time: 30 min (20°C/60% R.H.)

| | ES600003250 | 250 ml | 12 | |
|------------|-------------|--------|----|--|
| Mixing Tip | ES500000110 | 10 | 10 | |



Bona Pure



Bona LinoPrime



PU Filler



SANDING

ACCESSORIES

Colour.

| Resilient System | Туре | Article Number | Packaging | Pcs/transport package | Package pallet |
|--|---------------------------------------|--|--|---|-------------------|
| Bona Pure Colour | and being heavily | ensures a quick applicatic pigmented for coverage in ard colours but can also be a. | a single coat. Bor | na Pure Colour is a | ivailable in |
| Bona | Key Benefits: | | Technical Dat | a: | |
| EVERATE COLOUR PURCE COLOUR | Ultra-quick dryin | ed for excellent hide g for minimal downtime opular standard colours | Drying time: 2 Application to (11 mm pile) | erborne 2-comp -4 h between coat ols: Bona Roller -16 m²/L and applic | |
| | Custom | EC800020001 | 51 | | |

| | Custom | EC800020001 | 5 L | 1 | |
|---------------------|----------|-------------|-----|---|--|
| BEIGE | RAL 1001 | EC813720001 | 5 L | 1 | |
| LIGHT IVORY | RAL 1015 | EC814720001 | 5 L | 1 | |
| BRILLIANT BLUE | RAL 5007 | EC803620001 | 5 L | 1 | |
| LIGHT BLUE | RAL 5012 | EC805620001 | 5 L | 1 | |
| PIGEON BLUE | RAL 5014 | EC801620001 | 5 L | 1 | |
| PASTEL TURQUOISE | RAL 6034 | EC804620001 | 5 L | 1 | |
| BASALT GREY | RAL 7012 | EC802620001 | 5 L | 1 | |
| AGATE GREY | RAL 7038 | EC811720001 | 5 L | 1 | |
| TELEGREY | RAL 7047 | EC812720001 | 5 L | 1 | |
| JET BLACK | RAL 9005 | EC806620001 | 5L | 1 | |

Bona R Creative Chips

(EC1)



| Salt & Pepper | ES200013501 | 1 kg | 1 | |
|---------------|-------------|------|---|--|
| Black & White | ES200013502 | 1 kg | 1 | |
| Terra-mix | ES200013503 | 1 kg | 1 | |

Acrylate-based plastic chips for a livelier impression. Used in combination with Bona Pure

COATINGS | SPORT

| | SuperSport System | Туре | Article Number | Packaging | Pcs/transport package | Package/ pallet |
|---|------------------------|-------------------|-------------------------------|------------------|--------------------------|--------------------|
| В | ona SuperSport Pure HD | Bona SuperSport I | Pure HD is a hard-elastic and | I hardwearing Pl | JR coating for the | e treatment |



Bona SuperSport Pure HD is a hard-elastic and hardwearing PUR coating for the treatment of resilient floor coverings in sport halls.

Key Benefits:

- Tough PUR protection for resilient sport floors
- Rapid drying for minimal downtime. Back on the floor in 12 hours*
- Optimal application and levelling properties
- Compliant to EN 14904:2006 (Indoor Sport Surfaces)

Technical Data:

Category: Waterborne 2-comp **Drying time:** 2–4 h between coats **Application:** Bona Polyester Roller **Coverage:** 8–10 m²/L and application

| Matt | ES201620005 | 5 L | 3 | 36 |
|----------|-------------|--------|---|----|
| Hardener | ES205045001 | 0,45 L | 3 | |

Bona SuperSport Line Paint is a specialized line and court marking paint for use on finished

resilient sport floors. Can be used to paint line markings but also complete court borders

and zones. Available in ten mixable vibrant colours to achieve an endless array of shades.

Bona SuperSport Line Paint

Bona Re BuperSport Line Paint ReperSport Line Paint ReperSport Line Paint Reperson Reperson Report R

Key Benefits:

- Quick drying
- Requires no abrasion before overcoating
- Superb opacity (hiding ability)

Base: Polyurethane Category: Waterborne 2-comp Drying time: 1–2 between coats Application: Fine brush or short-haired roller Coverage: 6–10 m²/lit or 120–200 m of line-marking

Technical Data:

| Yellow | EC801113001 | 1 L | 1 | 36 |
|-------------|-------------|-----|---|----|
| Red | EC801413001 | 1 L | 1 | 36 |
| Orange | EC801213001 | 1 L | 1 | 36 |
| Light Blue | EC801813001 | 1 L | 1 | 36 |
| Dark Blue | EC801713001 | 1 L | 1 | 36 |
| Violet | EC801313001 | 1 L | 1 | 36 |
| Light Green | EC801613001 | 1 L | 1 | 36 |
| Dark Green | EC801513001 | 1 L | 1 | 36 |
| Black | EC801913001 | 1 L | 1 | 36 |
| White | EC802013001 | 1 L | 1 | 36 |

SANDING

ACCESSORIES

COATINGS | RESILIENT

| Resilient ESD System | Туре | Article Number | Packaging | Pcs/transport package | Package/ pallet |
|----------------------|---------------|--|--------------|---------------------------------------|--------------------|
| Bona Pure ESD Clear | | ear is a durable, highly trans isport it to ground. It is us e floors. | | | |
| | Key Benefits: | | Technical Da | ata: | |
| Pure ESD Clear | | otection for resilient floors ly 12 hours for minimal | 0, | aterborne 2-comp 1-3 h between coa | |

• Restores the conductivity of ESD floors

• Meets EN 61340-5-1:2001 standard

Drying time: 1-3 h between coats Application tools: Bona Roller (11 mm) Coverage: 15–20 m²/L and application

| Matt | ES251620001 | 5 L | 3 | 36 |
|----------|-------------|--------|---|----|
| Hardener | ES205045001 | 0.45 L | 3 | |

Used in conjunction with Bona Pure Colour ESD base paint, Bona Pure Vibrant is a durable top coat able to dissipate static electricity and transport it to ground. It has a high resistance to chemicals and common disinfectants.

Key Benefits:

downtime.

- Durable PUR protection for resilient floors
- Fast curing in only 12 hours for minimal downtime.
- Restores the conductivity of ESD floors
- Meets EN 61340-5-1:2001 standard

Technical Data:

Category: Waterborne 2-comp Drying time: 1-3 h between coats Application tools: Bona Roller (11 mm) Coverage: 15-20 m²/L and application

| Matt | ES2506200 | 001 5 L | 3 | 36 |
|----------|-----------|---------|---|----|
| Hardener | ES2050450 | 0,45 L | 3 | |

Bona Pure Colour ESD

Bon

A+

Bona Pure ESD Vibrant

Pure ESD Vibrant

Boni

A+

Bona



A+

Bona Pure Colour ESD is a waterborne base paint available in three versatile colours. It is heavily pigmented for exceptional coverage and is quick drying for minimal downtime. When used for renovating floors it improves the conductive properties and restore a high level of electrostatic safety.

Key Benefits:

- Heavily pigmented for exceptional coverage
- coverage
- Quick-drying for minimal downtime
- Restores the conductivity of ESD floors
- Meets EN 61340-5-1:2001 standard

Technical Data:

Category: Waterborne 2-comp Drying time: 1-3 h between coats Application tools: Bona Polyester Roller Coverage: 10-12 m²/L and application

| PIGEON BLUE | RAL 5014 | EC805620001 | 5 L | 1 | |
|---------------------|----------|-------------|-----|---|--|
| PASTEL TURQUOISE | RAL 6034 | EC801620001 | 5 L | 1 | |
| AGATE GREY | RAL 7038 | EC804620001 | 5 L | 1 | |



| lexiSand System | Туре | Article Number | Voltz/Hertz | Pcs/transport package | Effec | |
|-----------------|--|--|--|--|---|--|
| Bona FlexiSand | variety of floor pre heavy load. Bona | exible machine that can be o paration jobs. Its robust con FlexiSand is compatible wi ful, direction-free sanding. A | struction ensures th the Bona Powe | stable operation, erDrive, a unique | even und drive pla | |
| # | Key Benefits: | | Technical Dat | Technical Data: | | |
| A | Foldable handle transportationLarge wheels for | Powerful single-speed motorFoldable handle reduces space during | | Abrasive disc speed: 147 rpm Motor Power: 1.5/1.9 kW Total weight: 45 kg Height/Width/Depth: 1170 mm / 490 r / 640mm | | |
| | Ø 407 mm | AMO310002 | 230 V / 50 Hz | 1 | 1.9 kW | |
| Extra Weights | Mount on Bona Fle 2 X 7 kg | exiSand for extra pressure. ASK319994008 | | 1 | | |
| Extra Weights | | | | 1 | | |
| * * * | 2 X 7 kg The innovative Bo a new standard ir excellent performa reducing the nee | | n-free sanding teo Four rotating disc jeared plate and | he Bona FlexiSa chnique, the driv cs sand closely | e combine to the wa | |
| A Y | 2 X 7 kg The innovative Bo a new standard ir excellent performa reducing the nee | ASK319994008 na PowerDrive, to be used n sanding. Using a direction ance with easy operation. d for edge sanding. The g | n-free sanding teo Four rotating disc jeared plate and | he Bona FlexiSa chnique, the driv cs sand closely revolving discs | e combin to the wa | |
| Extra Weights | 2 X 7 kg The innovative Bo a new standard ir excellent performa reducing the need increased power for Key Benefits: • For powerful rota • Reduces the new leaves a 3 cm st | ASK319994008 na PowerDrive, to be used a sanding. Using a direction ance with easy operation. d for edge sanding. The g or excellent performance in | n-free sanding teo Four rotating disc leared plate and floor sanding. Technical Dat Compatible w No. of discs: 4 Disc diam.: 15 Weight: 6.7 kg | he Bona FlexiSa chnique, the driv cs sand closely revolving discs ta: ith: Bona FlexiSa 0 mm | e combin- to the wa also deliv and 1.5 | |

Gear ring for the Bona FlexiSand 1.9. Necessary if your FlexiSand 1.9 is not already equipped with this.



Internal Spur Gear

| | 1 | | 1 |
|---------------|---|---|---|
| ASK4099941643 | 1 | 1 | |

ACCESSORIES

🛞 SANDING | MACHINES

| FlexiSand System | Туре | Article Number | Voltz/Hertz | Pcs/transport package | Effect |
|-------------------------|---|--|--|--|---------------------------------------|
| Bona Quattro Disc | marks and rotation | r an excellent surface finish. onal scratches from edger m ults and is perfectly balance | achines. The Bo | na Quattro Disc w | vill optimize |
| | Ø 407 mm | ASO312530 | 4 x Ø 150 mm | 1 | |
| Replacement Pad Set | Replacement for b | roken or used pads for the C | Quattro Disc. | | |
| | Ø 150 mm | ASO319934 | | 4 | |
| | | | | | |
| Bona PowerDrive Connect | combines exceller can remove thick | rection-free sanding and bru nt performance with easy of layers of lacquer, replacing | beration. Mounted the need for co | d on the Bona Fle nventional belt sa | xiSand, it nding. Its |
| Bona PowerDrive Connect | combines exceller can remove thick click-on mount er | nt performance with easy op | peration. Mounted the need for co in disc and brush | d on the Bona Fle nventional belt sa | xiSand, it nding. Its |
| Bona PowerDrive Connect | combines exceller can remove thick click-on mount er plate is easy to ma Key Benefits: | nt performance with easy op layers of lacquer, replacing lables you to switch betwee anoeuvre in small, confined s | peration. Mounter the need for co in disc and brush paces. Technical Dat | d on the Bona Fle nventional belt sa within a minute. | xiSand, it nding. Its The drive |
| Bona PowerDrive Connect | combines exceller can remove thick click-on mount er plate is easy to ma Key Benefits: Flexible—one dr and brushing jol Reduces need f leaves a 3 cm st | nt performance with easy op layers of lacquer, replacing ables you to switch betwee anoeuvre in small, confined s ive plate for both sanding | peration. Mounter the need for co in disc and brush paces. Technical Dat | d on the Bona Fle nventional belt sa within a minute. a within a minute. a :a: ith: Bona FlexiSar | xiSand, it nding. Its The drive |
| Bona PowerDrive Connect | combines exceller can remove thick click-on mount er plate is easy to ma Key Benefits: Flexible—one dr and brushing jol Reduces need f leaves a 3 cm st Delivers a fantas | nt performance with easy op layers of lacquer, replacing hables you to switch betwee anoeuvre in small, confined s ive plate for both sanding ps. or edge sanding. Only rip against the wall. | beration. Mounted the need for co in disc and brush paces. Technical Dat Compatible w No. of discs: 4 | d on the Bona Fle nventional belt sa within a minute. a within a minute. a :a: ith: Bona FlexiSar | xiSand, it nding. Its The drive |
| Bona PowerDrive Connect | combines exceller can remove thick click-on mount er plate is easy to ma Key Benefits: Flexible—one dr and brushing jol Reduces need f leaves a 3 cm st Delivers a fantas sanding result Ø 407 mm | nt performance with easy op layers of lacquer, replacing hables you to switch betwee anoeuvre in small, confined s ive plate for both sanding os. or edge sanding. Only rip against the wall. stically fine and smooth | eration. Mounted the need for co in disc and brush paces. Technical Dat Compatible w No. of discs: 4 Disc diam.: 15 | d on the Bona Fle nventional belt sa within a minute. a ith: Bona FlexiSar 50 mm | xiSand, it nding. Its The drive |



| FlexiSand System | Туре | Article Number | Voltz/Hertz | Pcs/transport package | Effe |
|-------------------------------------|---|--|---|--|--|
| Bona Resilient Brush | | e mounted onto Power Driv g of different types of resilier | | ı click-on technolog | gy. Use fo |
| Cab | Ø 150 mm | ASK3199941040 | 1 | 4 | |
| ona Diamond Blades | Bona Diamond Blad | les are the ideal choice for s | peeding up stripp | ing of resilient floor | S. |
| | Ø 150 mm | ASK4099941643 | 1 | 4 | |
| Bona Diamond Blades Spare blades | Spare blades for the | e Bona PowerDrive Connec | t Diamond Blade | 98. | |
| | | ASK4000030634 | 1 | 6 | |
| | | | | | |
| Bona Pad Drive | to drive different p | e is delivered with the FlexiS ads and abrasive materials ffing and superficial sanding | for a large num | | |
| Bona Pad Drive | to drive different p | ads and abrasive materials | for a large num | | |
| | to drive different p oiling, cleaning, bu | ads and abrasive materials ffing and superficial sanding | for a large num | ber of applications | s includir |
| | to drive different p oiling, cleaning, bu Ø 407 mm Type Bona Supraflex is th you with those hard | ASO312501 Article Number Article Number he perfect sanding compan l-to-reach areas. It supports nding discs as well as brush- | s for a large num g. Voltz/Hertz ion to the Bona F all functions of th | PowerDrive Connections | Effe |
| Supraflex | to drive different p oiling, cleaning, bu Ø 407 mm Type Bona Supraflex is th you with those hard and can fit both sar sanding disc to bru Key Benefits: • Powerful 1400 W • Stepless speed s • Low height - Eas staircases, toe kid | ASO312501 Article Number ASO312501 Article Number A | s for a large num g. Voltz/Hertz ion to the Bona F all functions of th es. M14 tool fixtur Technical Dat Power: 1400 W | PowerDrive Connected Bona PowerDrive PowerDrive Connected Bona PowerDrive re – easy to change a: / 230 V – 50/60 Hz 00 rpm (stepless) 14 : 150 mm | Effe ct, helpin e Connec e betwee |

FLOOR CARE

ACCESSORIES

🛞 SANDING | MACHINES

| Dust Free Sanding | Article Number | Packaging | Pcs/transport package | Package/ pallet | | |
|---------------------|---|--|--------------------------|--------------------|--|--|
| Bona DCS 50 | Powerful & compact vacuum unit intended for both dry and wet cleaning. As part of the Bona Dust-Free sanding solution, DCS 50 collects the fine and hazardous wood dust from all Bona sanding machines. | | | | | |
| | Key Benefits: | Technical Data | a: | | | |
| 0.07 | Dust-free sanding For both dry and wet cleaning Dust class M Power outlet with auto-start function Light and handy | Weight: 19 kg Dimensions: 640 × 370 × 1045 mm Dust holding capacity: 50 L Motor power: 230 V, 50–60 Hz, 1,38 kW Hose length: 5 m | | | | |
| 5 -5-0 | AM11484430 | 1 | 1 | | | |
| Fleece Filter Bag | Fleece Filter bag for DCS 50. | | | | | |
| | AS3628893540 | 1 | 10 | | | |
| Flat pleated filter | Universal flat pleated filter for Bona DCS 50 for classes M and L, with a dust containment effic material and is rot-proof and insensitive to m fine dust and coarse dirt. | eiency of 99.9 %. T | he filter is made of | FPES fiber | | |
| | AS3628893550 | 1 | 10 | | | |



Pcs/transport Abrasives Dimension Grit **Article Number** Packaging package

Bona Diamond Abrasive Disc



Made using the hardest sanding agents in the world, Bona Diamond Abrasives are unique, delivering unparalleled sanding efficiency, durability and surface smoothness. Because the diamond grits are hard but not sharp, the result after fine sanding is a smooth, virtually scratch-free surface. Bona Diamond Abrasives last up to 15 times longer than competing screen or multihole sanding discs and deliver consistent performance, even after 100 m2 of sanding. And thanks to its unmatched hardness, each disc maintains its sanding performance throughout its lifetime.

Key Benefits:

| • | Longer lasting | Better surface |
|---|------------------|------------------------------------|
| • | Perfect evenness | Safe recoating |

| enness • | Safe | recoating | |
|----------|------|-----------|--|
|----------|------|-----------|--|

| Ø 150 mm | Grit 80 | AAS472000808 | 1 | 8 |
|----------|----------|--------------|---|----|
| Ø 150 mm | Grit 120 | AAS472001208 | 1 | 8 |
| Ø 125 mm | Grit 240 | AAS471902408 | 1 | 12 |
| Ø 150 mm | Grit 240 | AAS472002408 | 1 | 8 |

Bona Net Ceramic



The Bona Net Ceramic is mainly intended to be used for orbital or rotary sanders, such as Supraflex SE 14-2 or similar. It can also be used attached to Bona PowerDrive for medium sanding or removal of joint filler.

Key Benefits:

- Minimal clogging
- Good dust extraction
- Very high removal rate
- Independent on machine hole system


Grit type: Ceramic Aluminiumoxide Grit range: 80 Size: 150 mm Backing: Knitted fabric **Coating:** Electrostatic Bonding: Resin over resin

Technical Data:

| Ø 150 mm | Grit 80 | AAS473200806 | 1 | 50 |
|----------|----------|--------------|---|----|
| Ø 150 mm | Grit 100 | AAS473201006 | 1 | 50 |
| Ø 150 mm | Grit 120 | AAS473201206 | 1 | 50 |

Bona 8700 **Ceramic Disc**



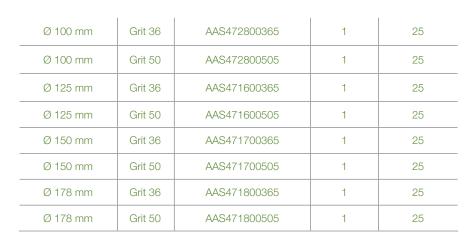

SANDING | ABRASIVES

| Pads | Dimension | Grit | Article Number | Packaging | Pcs/transpor package |
|--------------------------|-------------------------------|--------------------------|--|------------------------------------|-------------------------|
| Bona Intermediate Pad | A pressure-equalizing | g foam pad | that has the ability to fo | llow the contours | of the surface. |
| | Ø 125 mm | | AAS472102408 | 1 | 3 |
| | Ø 150 mm | | AAS472200008 | 1 | 4 |
| Bona Superpad 407 mm | Thick pad for Bona F | FlexiSand 1 | .5 and Bona Buffer. | | |
| | Thick pad for Bona F White | I | .5 and Bona Buffer. 6867300058 | Ø 407 mm x 25 r | nm 5 |
| | | AA | 1 | Ø 407 mm x 25 r Ø 407 mm x 25 r | |
| | White | AAS AAS | \$867300058 | | mm 5 |
| | White Tan | 2AA 2AA 2AA | S867300058 S867300038 | Ø 407 mm x 25 r | nm 5 nm 5 |
| | White Tan Red | 2AA 2AA 2AA 2AA | S867300058 S867300038 S867300048 | Ø 407 mm x 25 r Ø 407 mm x 25 r | nm 5 nm 5 nm 5 |

Bona Scrad Pad



Abrasive pad for Bona FlexiSand 1.5 and Bona Buffer. Used together with a Bona Scrad Wing it forms a unique abrasive system developed for cutting back grain raise between coats of finish. Minimizes scratches.

| Ø 407 mm x 8 mm | Grit 320 | AAS854303208 | 5 |
|-----------------|----------|--------------|---|
| Ø 330 mm x 8 mm | Grit 320 | AA970740 | 5 |

Bona Fiber Pad



Bona Fiber Pad Velcro Backing



Premium Sanding Pad developed for aggressive cleaning and polish removal.

| AA32153016 | Ø 407 mm | 1 |
|------------|----------|---|
| | | |

Fiber pad with velcro backing for aggressive cleaning and polish removal.

| AA32153180 | Ø 180 mm | 1 |
|------------|----------|---|
| AA32153150 | Ø 150 mm | 1 |



| oor Care | Туре | Article Number | Packaging | Pcs/transport package | Package pallet |
|------------------------|---|--|---|---|---|
| na PowerScrubber 2.0 | most indoor floc cleaning, combi deep, effective c delivers even mo | erScrubber is a versatile an or surfaces. Bona PowerScru ned with unrivaled versatility cleaning while the powerful, ore performance than most au o and transportation. | ubber 2.0 enables and ease. Counte yet compact desig | s the most effectiver-rotating roller bruids for the second second second second second second second second se | e deep-down ushes provide rScrubber 2.0 |
| | Key Benefits: | | Technical I | Data: | |
| | Effective deep Wide range of Ergonomic de | | Motor ratin Power supp Machine w Scrubbing I nylon Solution ca Recovery t | Ig: Max 2700 W, / ply: 230 V / 50 H; eight: 34.5 kg brush: 2 x 400 m apacity: 10 L ank capacity: 10 s: 520 mm x 470 | z m soft white |
| | | AM400201100 | | 1 | |
| er Brushes | | floors. floors (not high gloss). ng concrete and matt tiles. AS3647622500 | 400 mm | 1 | |
| | Red | AS3647624580 | 400 mm | 1 | |
| | Green | AS3647622520 | 400 mm | 1 | |
| | Black | AS3647624810 | 400 mm | 1 | |
| mmercial System Kit | The 60 cm wi | et sturdy telescopic pole m de mop base is specially de ubbing pressure. Delivered WM710013489 | signed with a rais | sed edge that help | os trap dirt a |
| No. | | | | | |
| | | | | | - (°) '))- |
| Dusting Pad | | t to be used dry. Consisting harge to trap and remove lo | | | |
| Dusting Pad | electrostatic c | | | | |
| Dusting Pad | electrostatic cl floors. 60 cm | harge to trap and remove lo | oose dust, dirt and | d debris, quickly a | and safely f |



| Resilient – Maintenance | | Article Number | Packaging | Pcs/transport package | Package/ pallet |
|-------------------------|---|---|--|---|--------------------|
| Bona PowerRemove R | 00 | ng agent developed for stripp prings such as PVC, Linoleum | 0 | 0 | |
| | Key Benefits: | | Technical Da | ta: | |
| Bona PowerRemove R | For quick removal of old maintenance coatings and contaminants Very high degree of efficiency Reduced pH prevents alkaline staining | | pH-value: approx. 9 (conc.) Dilution: 1:1 – 1:5 | | |
| Inter- Born | | EM703020001 | 5 L | 3 | 44 |
| Bona Clean R50 | with products from | is particularly suited for the m the Bona Resilient System. soiling. Clean R50 is also suit | . It may be used | for daily cleaning utomatic cleaning | , as well as |
| Bona " Clean R50 | Gentle, yet effer Highly concentr Low foaming | ctive, even at low dosage ated | Dilution (clear Normal: 50 m | prox. 9 (conc.) aning): I to 10 litres water) ml to 10 litres wa | . , |
| Bons | | EM701013001 | 1 L | 10 | 50 |
| | | EM701020001 | 5 L | 3 | 44 |

Bona Clean R60



Bona Shield R



Bona Clean R60 is a mild, water-soluble cleaner for the routine cleaning of resilient floors. It has dual-action properties, both cleaning and leaving a thin, protective film in one go. Clean R60 can give a subtle increase in gloss, and is compatible with the Bona Pure coating system.

Key Benefits:

- Cleaning and Maintenance in ONE
- Leaves a resoluble protective film
- Low foaming

Technical Data:

pH-value: approx. 9.5 (conc.) **Dilution:** 50 ml to 10 litres water (1:200) or 1 L to 10 litres water (1:10) cold water

| EP550013001 | 1 L | 10 | 50 |
|-------------|-----|----|----|
| EP550020001 | 5 L | 3 | 44 |

Bona Shield R was developed specifically for surfaces treated with a Bona Pure coating. However, it can also be used on other resilient surfaces, such as linoleum and PVC.

Key Benefits:

- High durability
- Quick drying
- Comfortable friction

Technical Data: Dilution: Do not dilute

Drying time: 1-2 hours at 20%60% R.H.

| Matt | EP501313001 | 1 L | 10 | 50 |
|-------|-------------|-----|----|----|
| Matt | EP501320001 | 5 L | 3 | 44 |
| Gloss | EP597013001 | 1 L | 10 | 50 |
| Gloss | EP597020001 | 5 L | 3 | 44 |



| oort – Maintenance | Туре | Article Number | Packaging | Pcs/transport package | Package pallet | |
|-------------------------------|--|--|--|--------------------------|-------------------|--|
| Bona SuperSport Cleaner | Concentrated slightly alkaline detergent specifically designed for frequent cleaning of indoor sports surfaces. Bona SuperSport Cleaner is gentle on the surface yet will effectively remove grease and grime, leaving no slippery or greasy film. Low foaming formula, suitable for autoscrubber as well as manual application. | | | | | |
| Bona Bone | Key Benefits: Safe on resilient floors Low emission Leaves no slippery residue | | Technical Data: Dilution: 1:100 for general use | | | |
| | | WM763020001 | 5 L | 3 | 44 | |
| Bona SuperSport Deep Clean | 0 | ccasional cleaning of indoo s well as build-up of body fa | | | | |
| Bona Barrfart Drap Chan | Key Benefits: Degreases floor and restores friction Removes synthetic materials from shoe soles Removes certain types of handball glue | | Technical D Dilution: 1:5 | ata: | | |
| - == | ML1 | WM636020001 | 5 L | 3 | 44 | |
| 200 F100 | ML2 | WM636020002 | 5 L | 3 | 44 | |

| Tools & Accessories | Туре | Article Number | Packaging | Pcs/transport package | Package/ pallet |
|--------------------------------|------|----------------|-----------|--------------------------|--------------------|
| | | | | | |

Bona SuperCoat Roller

| 10 cm | AT31002310 | 1 | 10 | |
|-------|------------|---|----|--|
| 25 cm | AT31002325 | 1 | 1 | |
| 38 cm | AT31002338 | 1 | 1 | |

Quality roller with a polyester pile for correct application rate of lacquer. 11 mm pile.

Roller Handle – 10 cm

Handle for 10 cm rollers.

| 10 cm AT31004000 | 1 | | |
|------------------|---|--|--|
|------------------|---|--|--|



| Tools & Accessories | Туре | Article Number | Packaging | Pcs/transport package | Package/ pallet |
|--|---|-------------------------------|-------------------|--------------------------|--------------------|
| Roller Handle – 25 cm | Corrosive resistant handle for 25 cm rollers. | | | | |
| | 25 cm | AT31014001 | 1 | | |
| | | | | | |
| Roller Handle 30-50 cm | Adjustable aluminium handle for 30-50 cm wide rollers. | | | | |
| | 30-50 cm | AT31002800 | 1 | 5 | |
| | | | | | |
| Bona Extension Bar, quick release | Professional exten | sion bars in aluminium with o | quick-release loc | king function. | |
| | 110-200 cm | AT31401002 | 1 | | |
| | | | | | |
| Bucket with Castors | For easy application | on of resilient coatings. | | | |
| - "e | 22 L | AT31008032 | 1 | | |
| | | | | | |
| Resilient shoe cover | Blue and white resilient shoe covers. | | | | |
| and the second sec | | AT33054000 | 1 | 100 | |
| | | | | | |
| Master Ventilator DF-20P | Fan that is suitable for accelerating the blowing time to enable faster work. | | | | |
| | | AS0902010 | 23 | 30 V | |
| | | | | | |

ACCESSORIES



Established in 1919, Bona is a world leading innovator with a unique system for resilient floor treatment. Through subsidiaries and distributors we have local presence in more than 90 different countries enabling us to be close to our customers and craftsmen.

Our long commitment and passion for floors enable us to offer lasting, sustainable results that meet floor needs for professionals and floor owners alike.

